


# Sesame Street Print Kit

## Atari Reference Card

### Important Keys

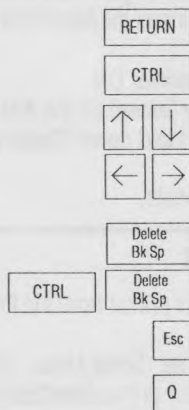

**RETURN KEY:** Selects a chosen menu option.

**CONTROL KEY:** Use as the command key for editing functions.

**CURSOR MOVEMENT KEYS:**

Up and down arrow keys move cursor up and down.

Right and left arrow keys move cursor left and right.

**EDITING KEYS:**

Delete key deletes the last character typed.

Press CTRL and delete keys keys to remove the character at the cursor.

**ESCAPE KEY:** Returns you to the previous menu.

**Q KEY:** Stops printing.

### Fonts

Avant Garde

Fine Print

Headline

Old English

Times

Xmas

Zapf

### Text Editing Commands

#### Fonts

Change Font  
Reassign Font

CTRL F  
CTRL G

#### Text Styles

Bold  
Italics  
Jazz  
Normal  
Outline  
Raised  
Shadow

CTRL B  
CTRL I  
CTRL J  
CTRL N  
CTRL O  
CTRL R  
CTRL S

### Text Styles

**Bold**

*Italics*

**Jazz**

**Normal**

**Outline**

**Raised**

**Shadow**

#### Text Size

Increases Size  
Decreases Size

CTRL A  
CTRL Z

#### Justification

Left Justify  
Right Justify  
Center Text

CTRL L  
CTRL T  
CTRL C

#### Other Commands

Help Screen  
Mask/Unmask Text  
Exit Text Editor

CTRL H  
CTRL M  
CTRL X

### Computer Equipment

Atari 400/800 XL/XE with 48K RAM or more.

One disk drive required, 2 disk drives recommended.

A dot matrix printer listed on the Printer Setup table.

---

## Booting Your System

- Insert Atari Sesame Street Print Kit program disk in Drive 1. If your computer has two drives, insert the Atari Print Kit graphics disk in Drive 2.
  - Turn monitor, disk drive(s), and printer ON.
  - While pressing your "Option" key (except on the 400 and 800 models), turn ON the computer. Hold down "Option" key until the screen turns blue.
  - The Print Kit program disk self-boots.
- 

## Printer Setup Instructions

- Be certain you choose the correct printer from the Printer Setup table.
  - Select "Options" while in the Printer Setup Menu. This allows you to set line feeds. Consult your printer/interface manual for detailed information.
  - Select "Test Printer". Use the 8-Inch Figure Test. Your printer should print the corners and the left edge of an 8 x 8 box. If not; you selected the wrong printer driver.
  - If your printout has broken lines, your line feeds may be set wrong, or you selected the wrong printer driver.
  - Select "Save Changes" after completing the Printer Setup.
  - Select "Exit to Main Menu" to access the Main Menu.
- 

## Atari Printer Setup

If Your Printer Is:	Choose:
Blue Chip M120/10	M120/10 Blue Chip
Citizen MSP10/15/20/25, Epson LX-80, Star NX-10, Star Gemini 10X, Panasonic 1091 C. Itoh	Non-ESC-2 Epson/IBM C. Itoh
Epson LQ 800**	LQ 800 Epson**
Hewlett-Packard QuietJet+	QuietJet H.P.
Hewlett-Packard QuietJet+***	Wide QuietJet
IBM 5152, Commodore MPS 1000 (IBM mode), Epson FX-80, Okidata M182a/183a, Okimale 20 (IBM mode), Radio Shack DMP 130 (IBM mode)	ESC-2 Epson/IBM
Mannesman Spirit 80	Spirit 80 Mann. Tally
Okidata ML 192/193	Oki 19X (Microline)
Okidata 292/293 (IBM P.M.)*	Oki 29X (IBM)*
Okidata ML 292/293 (Microline P.M.)	Oki 29X (Microline)
Okimale 10	Okimale 10
Okimale 20 (Apple IIe P.M.)	Imagewriter
Panasonic KX-P1080	KX-P1080 Panasonic
Radio Shack DMP 130 (TRS mode)	DMP 130 Tandy
Radio Shack DMP 500	DMP 500 Tandy
Star NB 24-15**	NB-24 Star**
Star SG 10	SG 10 Star
Wide Star MB-24***	Wide NB-24
Texas Instruments 857	TI 857
Toshiba P321**	P321 Toshiba**

\* 16 pin mode and 8 pin mode (where available).

\*\* 24 pin mode and 8 pin mode (where available).

\*\*\* Use full 15" carriage and printer paper. Printout will exceed one page.