

HES

HES

100

Sound Box™

Sound Box is an enhancement device compatible with VIC-20, Commodore 64, Atari 800 or TI-99/4A. Allows use of standard audio or video connections. Connects to amplifier, monitor or headphones. Creates a whole new dimension of arcade play.



Arcade Sound
Effects!


Sound Box
E403

Sound Box™

HES

HES

Sound Box Connections

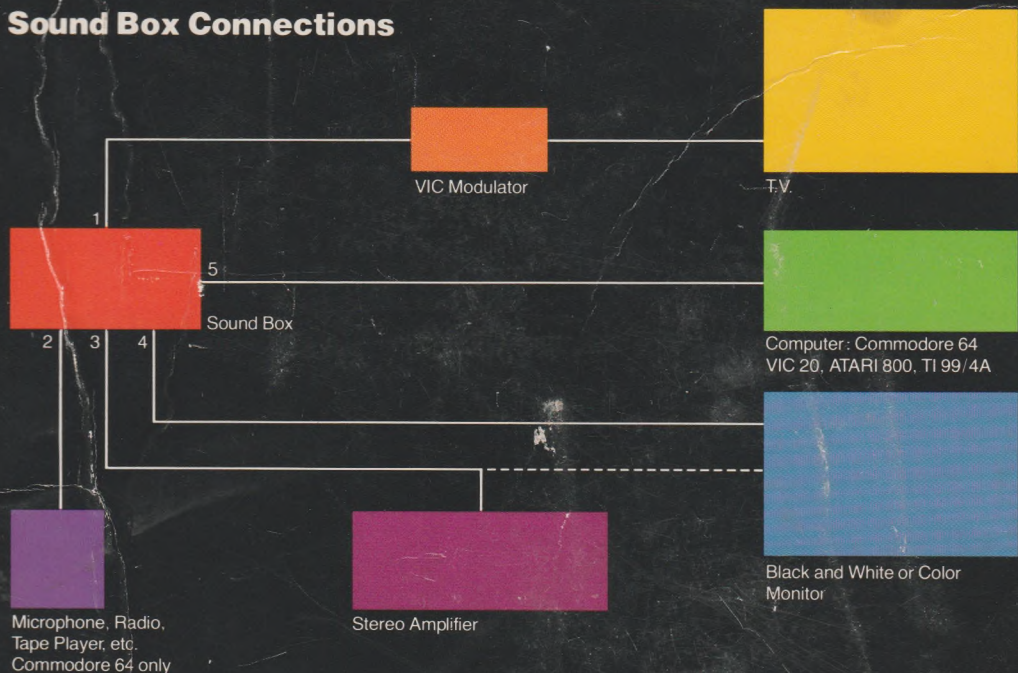

- 1 Audio input allows sound to be input to the Commodore 64 and processed by the filters. INPUT is 100K ohms impedance and should not exceed 3 volts peak to peak. See page 472 of the Commodore 64 programmers reference guide for details. Warning! This is for Commodore 64 only, on most other computers it provides 5 volts. Use caution not to connect something that should go to AUDIO OUTPUT or VIDEO OUTPUT as damage may result. Requires male RCA phono plug AUDIO OUTPUT.
- 2 Audio output provides sound output for your monitor, or attaches to your stereo for enhanced sound effects. Connect to stereo TAPE INPUT, or AUX INPUT (left or right channel), and set stereo to MONO MODE for best results. Requires male RCA phono plug to male RCA phono plug for most stereos, or male RCA stereo plug to compatible monitor plug.
- 3 Video output provides video signal for black and white or color monitors. For best results on black and white monitors, set screen to black and use white lettering (refer to computer owners manual for instructions). Requires male RCA phono plug to computer monitor plug.
- 4 Cable connects to video jack of computer to install sound box. Consult computer owners manual for proper location.
- 5 Modulator Jack is the direct feedthrough of computer jack. Can be used with VIC 20 by plugging the modulator into this jack instead of the VIC 20, allowing you to connect to a standard T.V. and still have all the above features.

Sound Box

E403

© 1983 Human Engineered Software
71 Park Lane, Brisbane, CA 94005.
HES is a division of USI International

Commodore 64 and VIC 20 are TM's
of Commodore. Sound Box is a TM of HES.
Printed in USA

E403



HES

**Sound
Box**

© 1992 HES. Made in Taiwan. Printed in USA



ALDO WIDE

ALDO WIDE

